


NEMA Plug Configurations

Standardized NEMA configurations for single rated devices were created to minimize the possibility of unsafe mating of unmatched voltages and amperage. The standard also defines dimensional

requirements to assist the user in selecting the proper product for a particular need. Use the figures below to help identify the correct device for your specific application.

*R-Receptacles
P-Plug*

STRAIGHT BLADE DEVICES (SEE PAGES 510, 513, 518, 520, 521, AND 522)

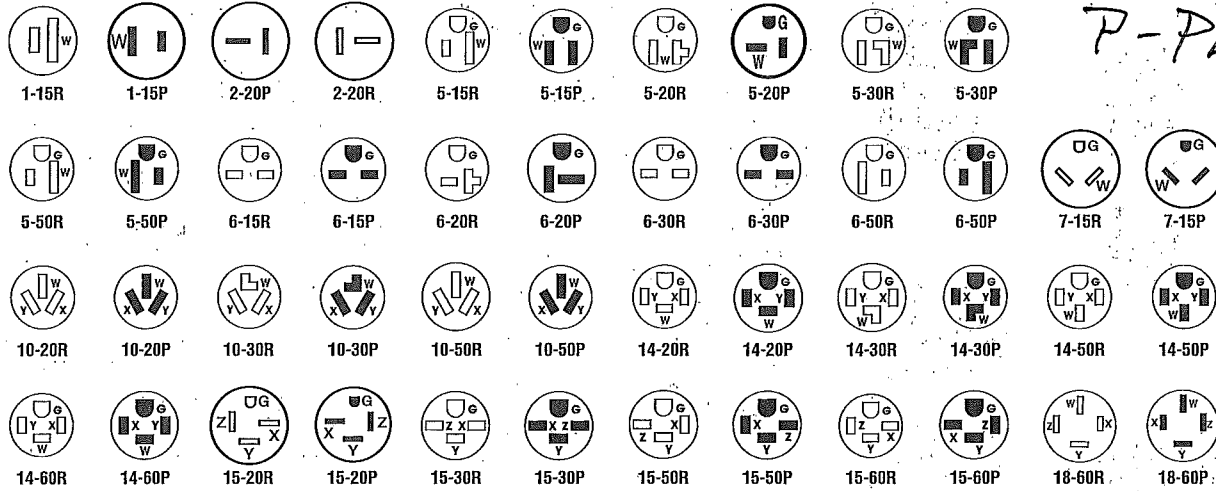

TWIST-LOCK DEVICES (SEE PAGES 520, 523, 524, 525, AND 526)

